

Linear guide rail

Shaped profile, technopolymer, stainless steel

GUIDE PROFILE

Polyethylene based (HMWPE) technopolymer, natural colour.

BRACKET

AISI 304 stainless steel.

FEATURES AND APPLICATIONS

GLS side guide with shaped profile is used for the side guide of products with different dimensions on conveyor belts (Fig.1), without leaving traces on the containers.

High molecular weight polyethylene (HMWPE) has a high wear resistance; it is particularly suitable for high-speed movements due to its low coefficient of friction.

They are generally used with GLT or GLP-12 side guides (Fig.2) in case of products with important vertical dimensions.

Supplied in bars of 1500 or 3000 mm length.



ACCESSORIES ON REQUEST

Guide rail clamps MPG-S, MPG-2, MPG.

End brackets for linear guide rails TGLT.

Fig.1




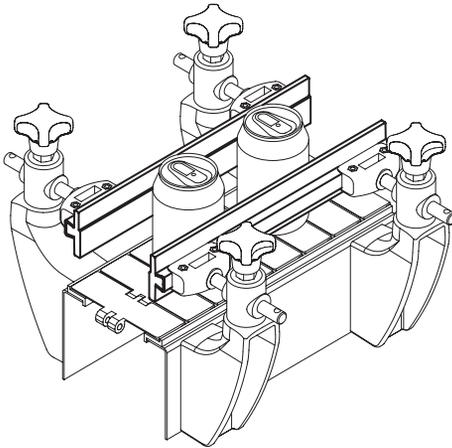


Fig.2

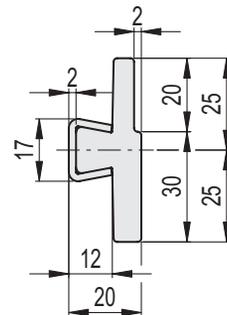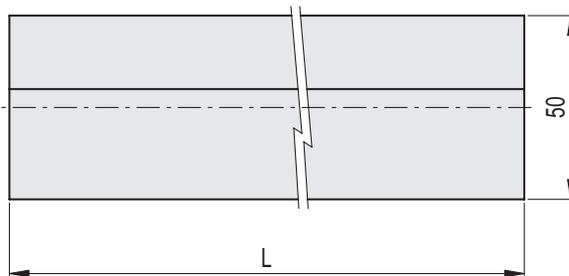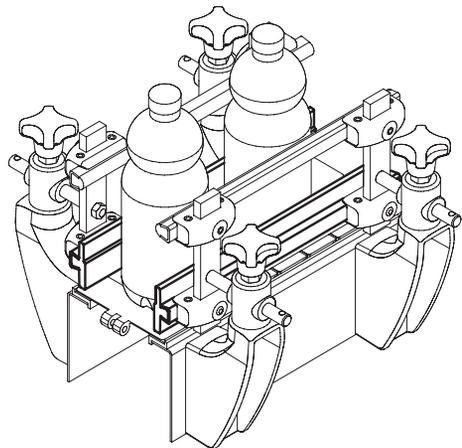

STAINLESS STEEL

Code	Description	L	ΔΔ
419211	GLS-50-30-1500	1500	1553
419212	GLS-50-30-3000	3000	2070