

Two-Way Connector Clamps

Stainless Steel, Split Assembly

SPECIFICATION

Identification no.

- No. **2**: With 3 socket cap screws ISO 4762

Connector clamp

Stainless steel AISI CF-8 **NI**

Matte shot-blasted

Socket cap screws ISO 4762

Stainless steel

INFORMATION

The clamping bores of the two-way connector clamps GN 131.3 are designed for typical construction tubes. The square sections s_1 and s_2 also allow bars or tubes with a square cross-section to be clamped.




At the screw locations z_1 and z_2 , socket cap screws reduce the bore cross-section for clamping. The split clamping point z_2 allows the connector clamp to be subsequently inserted into an existing structure and facilitates assembly when axial sliding is not possible, e.g., due to tight bending radii.

ACCESSORY

- GN 990 (see page 1904) Construction Tubes

TECHNICAL INFORMATION

- Stainless Steel Characteristics (see page A26)

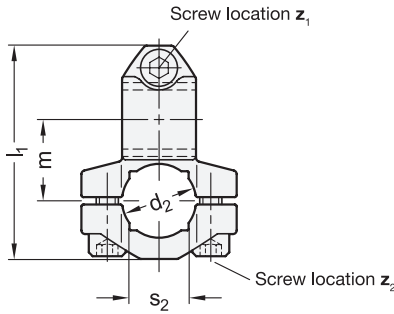

GN 131.3

STAINLESS STEEL

Description	d ₁	d ₂	k	l ₁	l ₂	m	s ₁ Square	s ₂ Square	z ₁ Screw location	z ₂ Screw location	⚖
GN 131.3-B12-B12-2-NI	B 12	B 12	12	36.5	25	14	10	10	M4-12	M4-12	32
GN 131.3-B20-B12-2-NI	B 20	B 12	20	51	42	20	16	10	M6-20	M6-12	133
GN 131.3-B20-B20-2-NI	B 20	B 20	20	57	42	22	16	16	M6-20	M6-18	134